


# SINGLE-USE PDF LOGGER AT A GLANCE



**LogTag**®

**USRID-16**  
Single-Use Display USB PDF  
Temperature Recorder

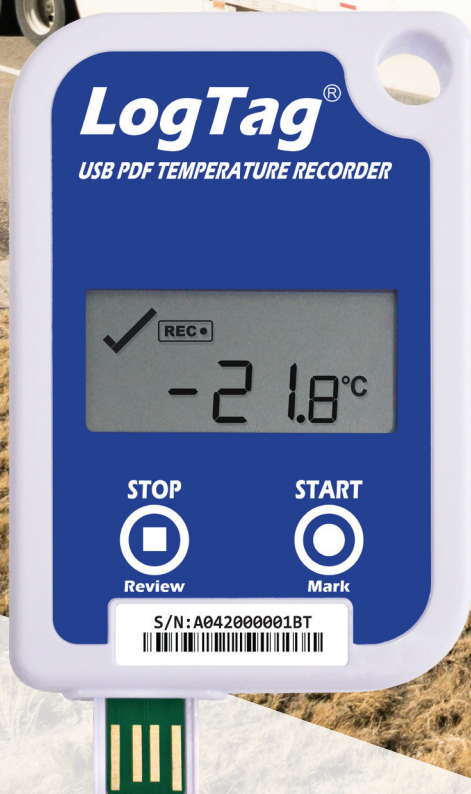


The LogTag® USRID-16 measures and stores real time temperature readings over a measurement range of -30°C to +60°C (-22°F to +140°F). The LogTag® USRID-16 combines all the features of an advanced temperature recorder with a 16,000 log memory.


The display is designed to show 'at a glance' if there has been a temperature excursion. The USRID-16 plugs directly into the computer USB for an easy configuration by the user for a wide range of recording and alert conditions for upper and lower alarm.

## Accessories

---

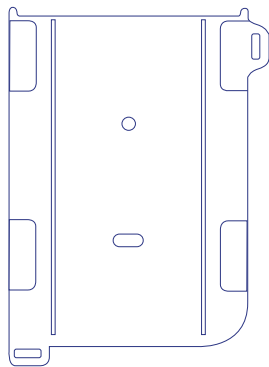

*Wall Mount*  
Not Included

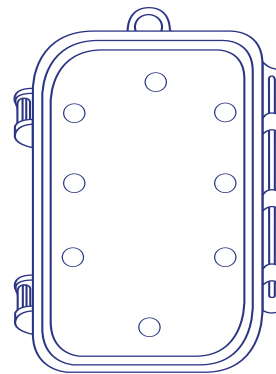

*Protective Enclosure*  
Not Included

# Features

---



Records temperature from -30°C to +60°C



Comprehensive customization options including alarm settings, sample interval and trip duration.



Up to 16,000 recordings - enough for the longest trip.



Automatic generation of a PDF, CSV, LTD report without special software.



In-transit inspections can be recorded at the push of a button.



Integral USB connector - no separate Interface Cradle required.



Fixed battery provides 2 years storage, followed by 6 months normal use.

# Applications



Pharmaceutical Transport



Vaccines Transport



Produce Transport



Perishables Transport

# Specifications

<b>Product Model</b>	USRID-16 (Fixed battery).
<b>Sensor Measurement Range</b>	-30°C to +60°C (-22°F to +140°F).
<b>Operating Temperature Range</b>	-30°C to +60°C (-22°F to +140°F).
<b>Storage Temperature Range</b>	0°C to +40°C (32°F to +104°F). (This is the optimal recommended storage temperature range).
<b>Rated Temperature Reading Accuracy</b>	Better than $\pm 0.5^{\circ}\text{C}$ ( $\pm 0.9^{\circ}\text{F}$ ) for $-5^{\circ}\text{C}$ to $+30^{\circ}\text{C}$ ( $23^{\circ}\text{F}$ to $+86^{\circ}\text{F}$ ). $\pm 0.8^{\circ}\text{C}$ ( $\pm 1.5^{\circ}\text{F}$ ) or better for measurements in other areas of rated range. <i>Actual performance is typically much better than the rated values. Accuracy figures can be improved by recalibration.</i>
<b>Rated Temperature Reading Resolution</b>	Better than $0.1^{\circ}\text{C}$ or $^{\circ}\text{F}$ . <i>LogTag Analyzer<sup>®</sup> currently displays to one decimal place of <math>^{\circ}\text{C}</math> or <math>^{\circ}\text{F}</math>. The native resolution is what is stored in the LogTag<sup>®</sup>.</i>
<b>Sensor Reaction Time</b>	Typically less than 7 minutes (T90) in moving air (1m/s).
<b>Recording Capacity</b>	16129 temperature readings. 56 days @ 5min logging.
<b>Sampling Interval</b>	Configurable from 30 seconds to 18 hours.
<b>Logging Start Options</b>	Push button start or specific date & time. Optional start delay of 1 minute to 72 hours.
<b>Recording Indication</b>	'REC' symbol on display.
<b>Alarms</b>	1 upper and 1 lower alarm.
<b>Download Time</b>	Typically with full memory (16,129 readings) in less than 20 seconds from time of insertion to availability of PDF report. Typically less than 10 seconds from time of insertion to availability of LTD file in LogTag <sup>®</sup> Analyzer (if configured).
<b>Environmental</b>	IEC 60529: IP64 with USB cap fitted.
<b>Power Source</b>	CR2032 3V LiMnO <sub>2</sub> Battery (Non-Replaceable).
<b>Battery Life</b>	2 years storage life, followed by 6 months normal use.
<b>Real Time Clock</b>	Built-in real time clock. Rated accuracy $\pm 25\text{ppm}$ @ $25^{\circ}\text{C}$ (equivalent to 2.5 seconds/day). Rated temperature coefficient is $-0.034 \pm 0.006\text{ppm}/^{\circ}\text{C}$ (I.e typically $\pm 0.00294$ seconds/day/ $^{\circ}\text{C}$ ).
<b>Connection Interface</b>	USB 2.0, A-type plug.
<b>Software</b>	PDF Reader, LogTag <sup>®</sup> Analyzer 2.5 or higher.
<b>Size</b>	93mm(H) x 54.5mm(W) x 8.6mm(T) including protective USB cap.
<b>Weight</b>	31g.
<b>Case Material</b>	Polycarbonate.

